


Versa-Kool® VK20 20" Circulation Fan with Tapered Guards, Cord & Mount—5470 CFM, 1/3 HP, 115/230 Volt



- HEAVY-DUTY—great for outside events and tents
- LEGENDARY—greater air movement and superior cooling
- BEST-IN-CLASS—deep-guard design for low noise levels and unrivaled safety
- Matched heavy-duty motor and blades
- 2-year limited warranty and a powder-coated steel ceiling mount bracket included

Product Description

The Versa-Kool® VK20 20" Circulation Fan with Tapered Guards, Cord & Mount—5470 CFM, 1/3 HP, 115/230 Volt is the ideal cooling solution for outside events and tents. Engineered to produce greater air movement and superior cooling, it's the right choice no matter the application. The best-in-class deep-guard design creates extreme airflow, low noise levels, and unrivaled safety. The matched heavy-duty motor and blades provide maximum velocity, and the specifically designed, power-coated steel guards give this legendary fan its trusted durability, long life, and corrosion resistance. Plus, the supplied powder-coated steel ceiling mount bracket makes for easy installation. Includes a 2-year limited warranty.

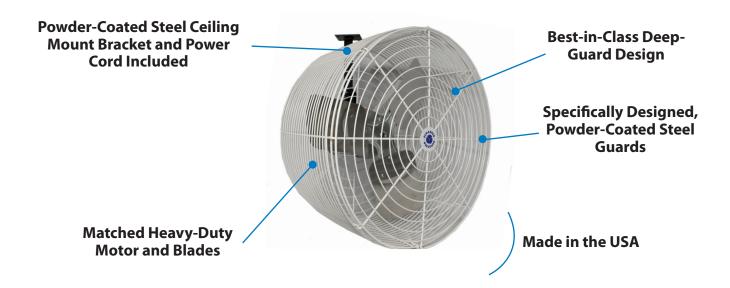

Features and Benefits

- Great for outside events and tents
- Engineered to produce greater air movement and superior cooling
- Best-in-class deep-guard design for extreme air flow, low noise levels, and safety
- Specifically designed, powder-coated steel guards for trusted durability and corrosion resistance
- Maximum velocity for up to 5470 CFM
- Matched heavy-duty motor and blades

- Powder-coated steel ceiling mount bracket included
- Power cord included, not pre-wired
- Wide variety of mounting options available
- Misting kits available for even greater cooling
- Assembled in the USA
- 2-year limited warranty

Key Specs

Model Number	VK20	Variable Spee
Brand	Schaefer® Versa-Kool®	Speed (RPM)
Warranty	2-year limited warranty	Thrust (lbf)
Net Weight (lb.)	37	Volts
Air Flow (CFM)	5470	Amps
Motor Size (HP)	1/3	Tested
Fan Diameter (in.)	20	Shipping Dim

Variable Speed	Yes
Speed (RPM)	1725
Thrust (lbf)	4.26
Volts	115/230
Amps	3.8 / 1.9
	Bess Lab
Tested	Tested
Shipping Dimensions (in.)	23 x 23 x 18