

MODEL-C

18watt single specturm channel Clone LED (2pcs)

The ThinkGrow MODEL-C is a 3.6' Clone LED Bar, it is a revolutionary solution for high-density indoor plant propagation. It is specifically designed to optimize conditions for seedlings, cuttings, and young plants during their crucial early growth stages, focusing on root development and initial leaf growth. Key features include lamp bead protection, waterproof and weather-resistant characteristics. The MODEL-C provides a solid, stable, and gentle full spectrum light intensity to prevent seedling burn, ensuring an optimal spectrum for root development and energy-efficient operation for continuous use.



Specifications

MODEL-C

PPF

PPF	36 μmol/s
-----	-----------

Efficacy

Efficacy	2.0 μmol/J
----------	------------

IP Water Resistance

IP Rating	IP66
-----------	------

Intput Power

Intput Power	18W
--------------	-----

Input Voltage

Input Voltage	Autosensing 100-277V~
---------------	-----------------------

Mounting Height

Height	>6" (15.2cm) Above Canopy
--------	---------------------------

Lifetime

Lifetime	L90: >54,000 hours
----------	--------------------

Warranty

Warranty	5 Years Standard Warranty
----------	---------------------------

Power Factor

Power Factor	≥ 90%
--------------	-------

Working Environments

Temperature	-4~104°F (-20~40°C)
Humidity	≤90%RH

Package Dimensions

Size	47.54inch / 1207.5 mm(L) x 2.72inch / 69 mm(W) x 3.35inch / 85 mm(H)
Weight	3.75lbs / 1.7kg


Package Contents

MODEL-C Clone LED	2pcs
12' 120V Power Cord	1pc
Cabel Ties	4pcs
Steel Clips	4pcs


Link Up

MODEL-C


MODEL-C Installation Guide

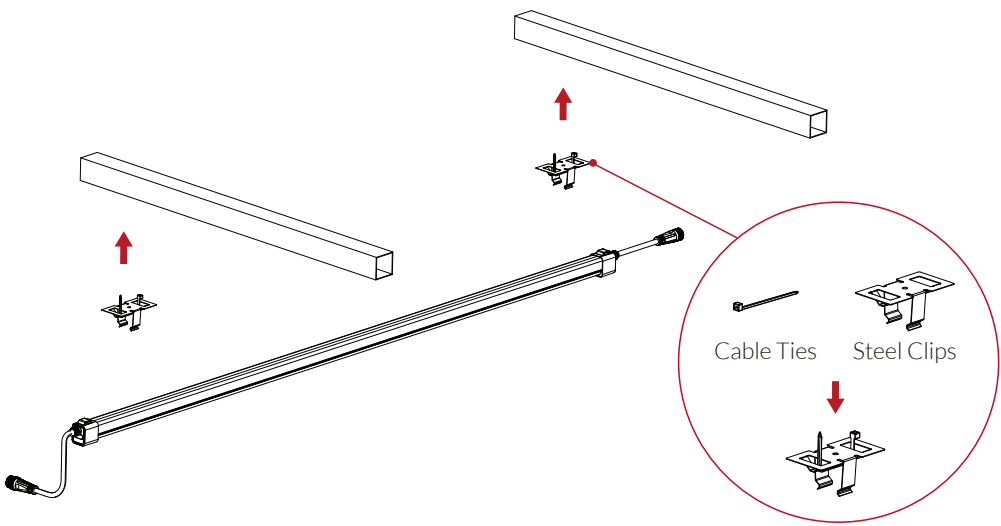


1. Securely fasten the steel clips to a fixed, solid ceiling structure (e.g., unistrut, grow rack). Ensure the clips are positioned no more than 4 feet apart.

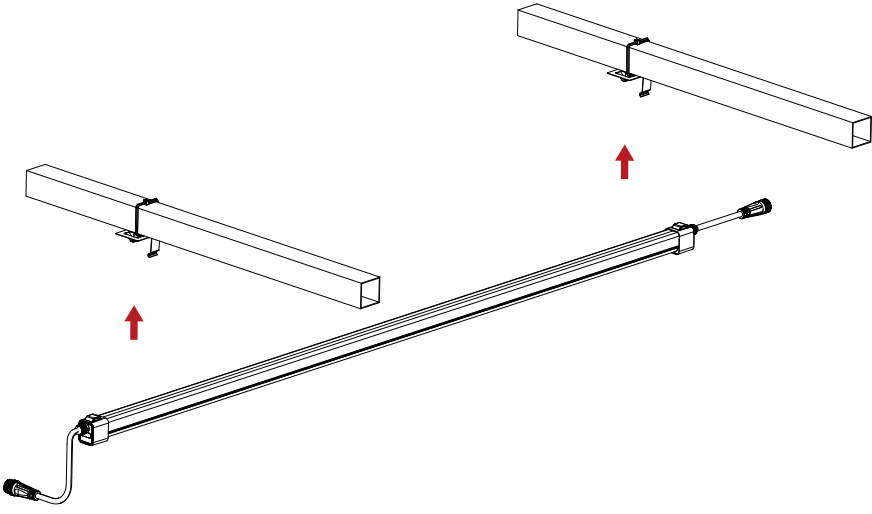

2. Lock the fixture securely into both steel clips.

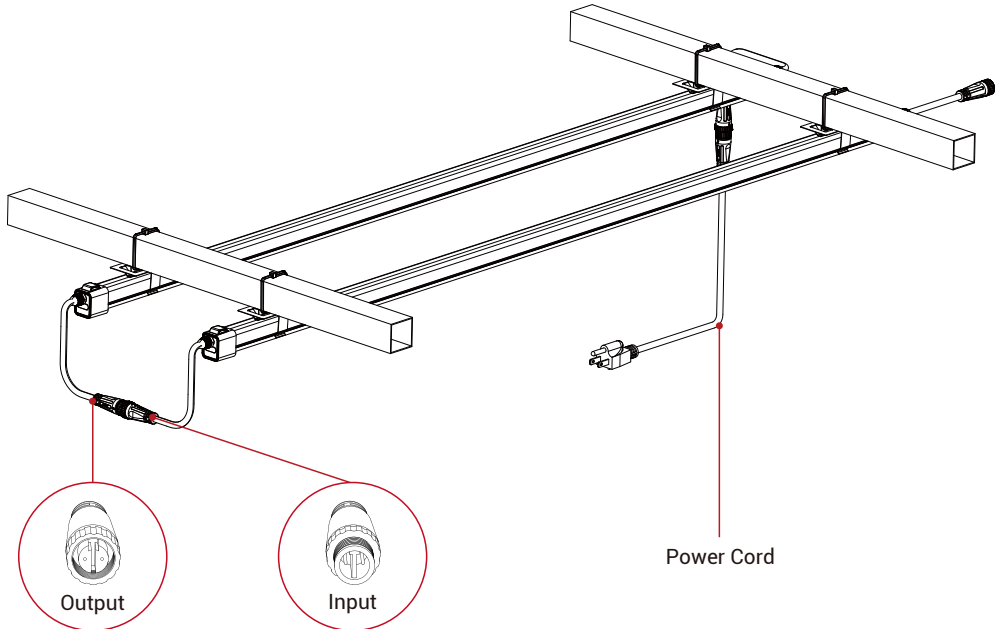


3. To daisy-chain multiple clone light bars, position the input of one fixture right next to the output of the next. Remove the protection cover, then connect and lock the input and output together.

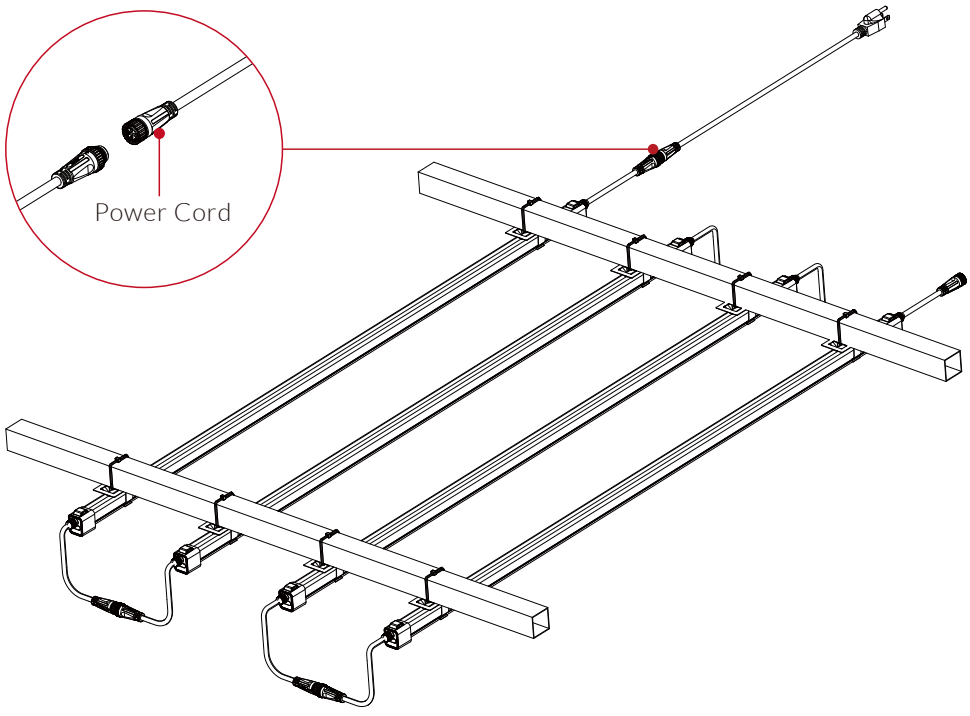

A single power source can connect and power up to 90 clone light bars in a daisy chain configuration. Once daisy-chained, connect the 120V power cord to the power source to energize all fixtures.

SPECTRUM

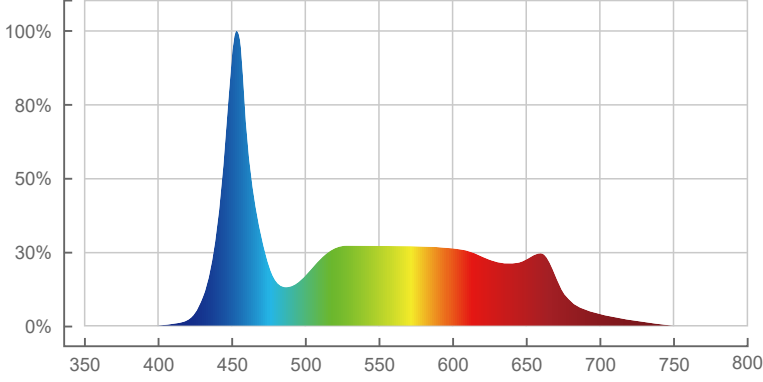

DIMENSIONS

