


## SPECIFICATIONS

Light Source	LED
Light Output PPF	1188 $\mu\text{mol/s}$
Efficacy PPE	3.3 $\mu\text{mol/J}$
AC Input Power	360W
AC Input Voltage	120V-277V AV, 50/60Hz
Light Distribution	120°
Coverage	4'x4' - 4'x6'
Chips	Full Spectrum Custom Diodes+Osram 6.24
Thermal Management	Passive
Max Ambient Temperature	95° F / 35° C
Dimming	0 - 10V
Total Harmonic Distortion (THD)	15%
Lifetime	L90 > 5000 Hrs
IP Rating	IP65
Certifications	ETL DLC
Warranty	10 Year Standard Warranty

Product is wattage adjustable. Range can be adjusted from 100W - 360W  
NOMINAL ELECTRICAL AC INPUT\*

AC Voltage	120V	240V	277V
AC Current	3.86A	3.80A	3.75A
AC Power	3.19A	1.6A	1.35A
Power Factor	0.99	0.98	0.97

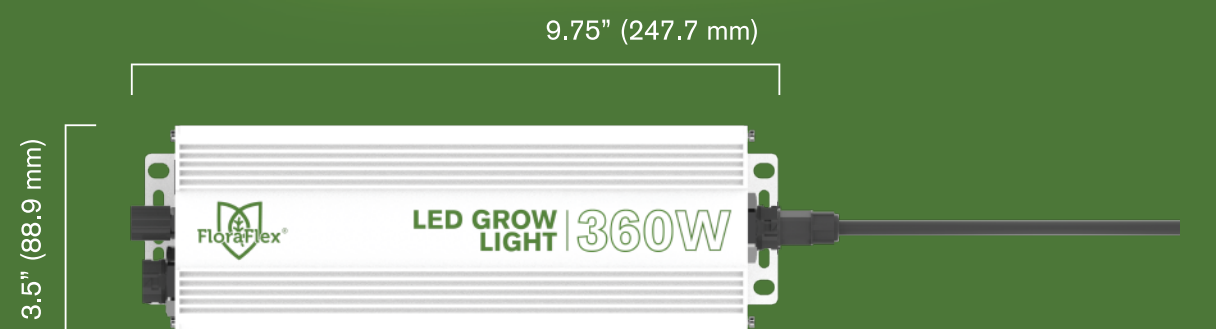

### GUARANTEED BY:

FLORAFLEX CORP.  
4804 LAUREL CANYON BLVD.,  
SUITE 1047, STUDIO CITY, CA 91607  
WWW.FLORAFLEX.COM  
855-855-1053



R & D

### PPFD CHART @ 12"



4' x 4' Coverage




Dynamic



Shop FloraFlex




Product Review

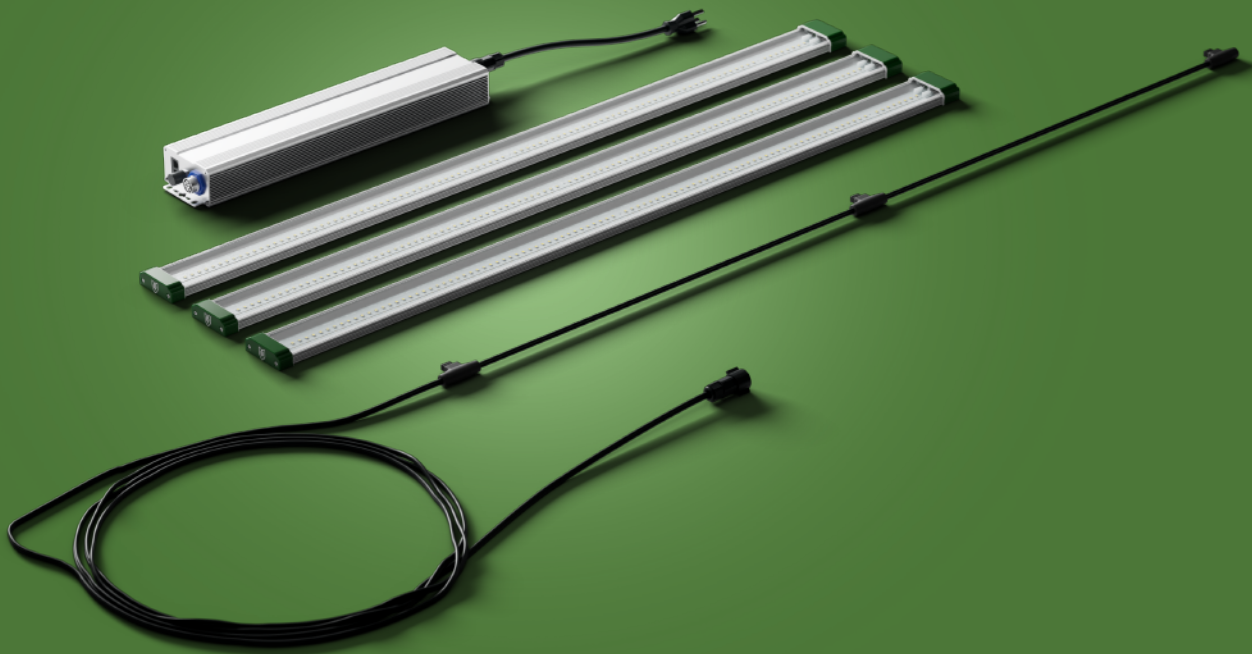

Certified by DLC Hort and rebate-eligible.  
Scan to find out more.

### SPECTRUM

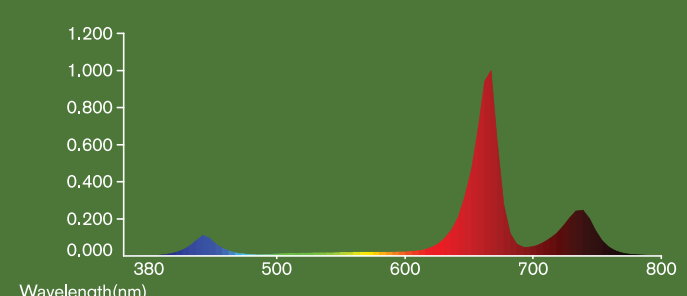

RoHS



Intertek