


## SPECIFICATIONS

Light Source	LED
Light Output PPF	2376 $\mu\text{mol/s}$
Efficacy PPE	3.3 $\mu\text{mol/J}$
AC Input Power	720W
AC Input Voltage	120V-277V AV, 50/60Hz
Light Distribution	120°
Coverage	4'x8' - 4'x12'
Chips	Full Spectrum Custom Diodes+Osram 6.24
Thermal Management	Passive
Max Ambient Temperature	95° F / 35° C
Dimming	0 - 10V
Total Harmonic Distortion (THD)	15%
Lifetime	L90 > 5000 Hrs
IP Rating	IP65
Certifications	ETL DLC
Warranty	10 Year Standard Warranty

Product is wattage adjustable. Range can be adjusted from 100W - 720W  
NOMINAL ELECTRICAL AC INPUT\*

AC Voltage	120V	240V	277V
AC Current	735W	725W	720W
AC Power	6.13A	3.02A	2.60A
Power Factor	0.98	0.98	0.97

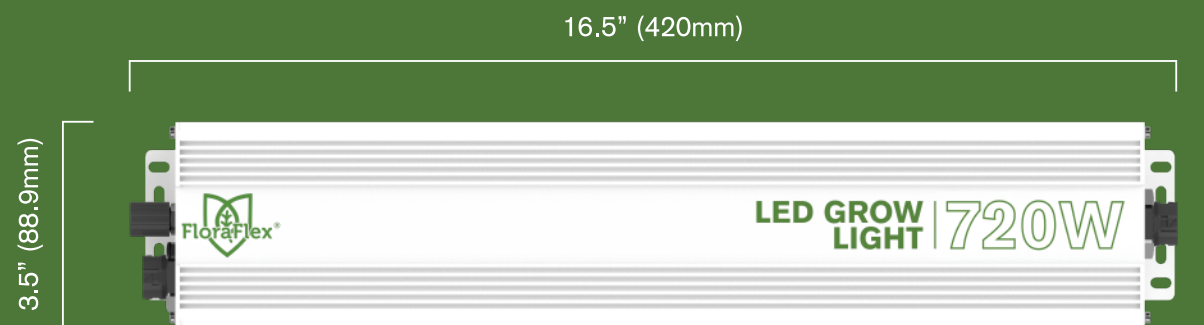

### GUARANTEED BY:

FLORAFLEX CORP.  
4804 LAUREL CANYON BLVD.,  
SUITE 1047, STUDIO CITY, CA 91607  
WWW.FLORAFLEX.COM  
855-855-1053



R & D

### PPFD CHART @ 12"

404	514	574	615	615	574	514	404
554	622	704	708	708	704	622	554
537	633	730	766	766	730	633	537
554	647	741	780	780	741	647	554
554	647	741	780	780	741	647	554
537	633	730	766	766	730	633	537
554	622	704	708	708	704	622	554
404	514	574	615	615	574	514	404

4' x 4' Coverage




Dynamic




Shop FloraFlex



Product Review

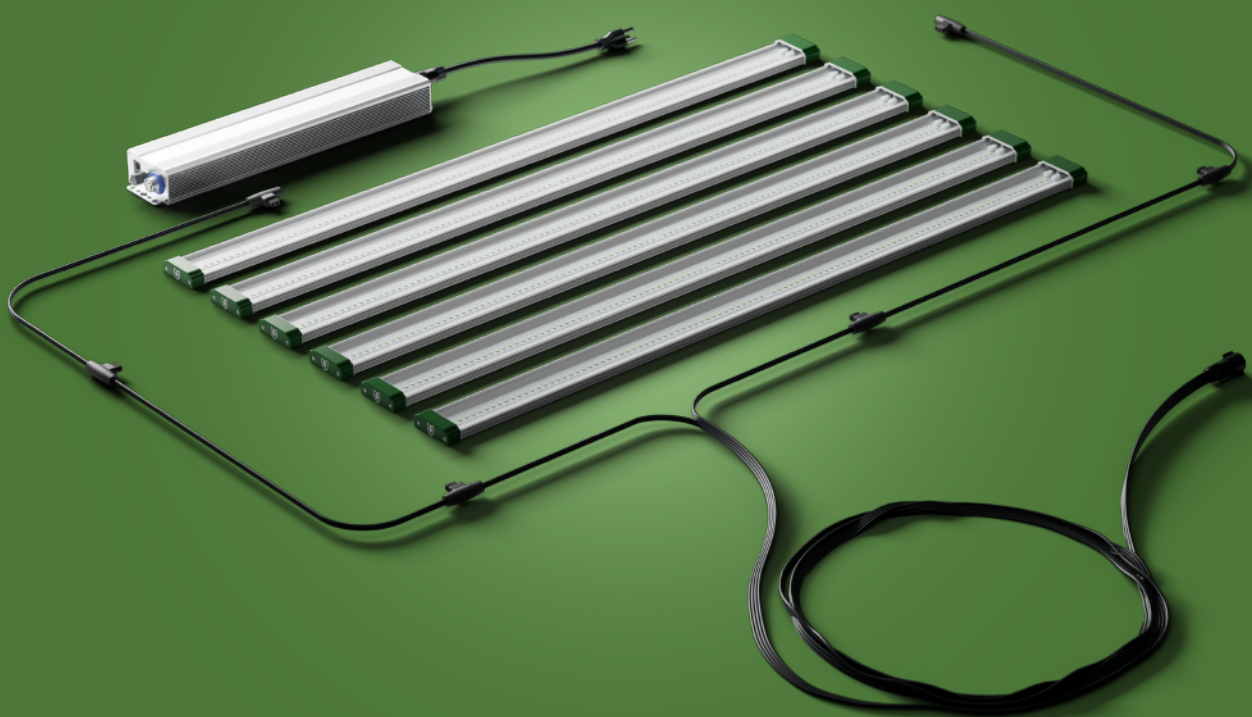

### SPECTRUM

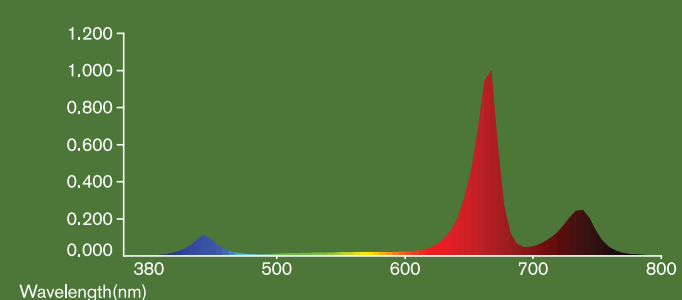

RoHS



Intertek



Certified by DLC Hort and rebate-eligible.  
Scan to find out more.