HS-1

Humidstat Station

The HS-1 from TrolMaster is used to control commercial dehumidifiers. Most larger / commercial dehumidifiers have a “low-volt” control option so the dehumidifier can be controlled by an external humidistat. The HS-1 works and is wired exactly like an external humidistat. The HS-1 is the best way to control your dehumidifiers by eliminating the need to control the high-amperage / inrush current associated with dehumidifiers.



Specifications

HS-1

Input Voltage

Input Voltage	12V~

IP Rating

IP Rating	IP20

Maximum Current

Maximum Current	0.1A

Working Environments

Temperature	32~122°F (0~50°C)
Humidity	≤90%RH

Package Dimensions

Size	6.30inch / 160mm(L) x 3.39inch / 86mm(W) x 3.39inch / 86mm(H)
Gross Weight	0.88lbs / 0.40kg


Package Contents


Humidistat Station	1pc
16ft RJ12 Cable	1pc
4ft RJ12 Cable	1pc
T-shaped Splitter	1pc

Link Up


HS-1

Connection Diagram

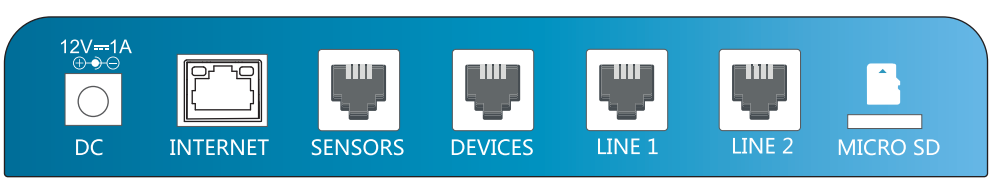

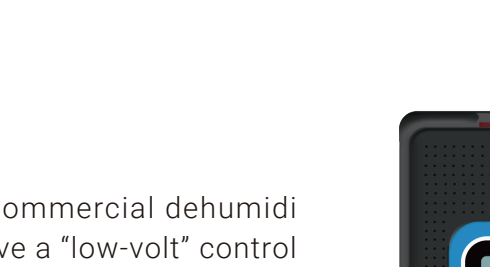

Product Dimensions

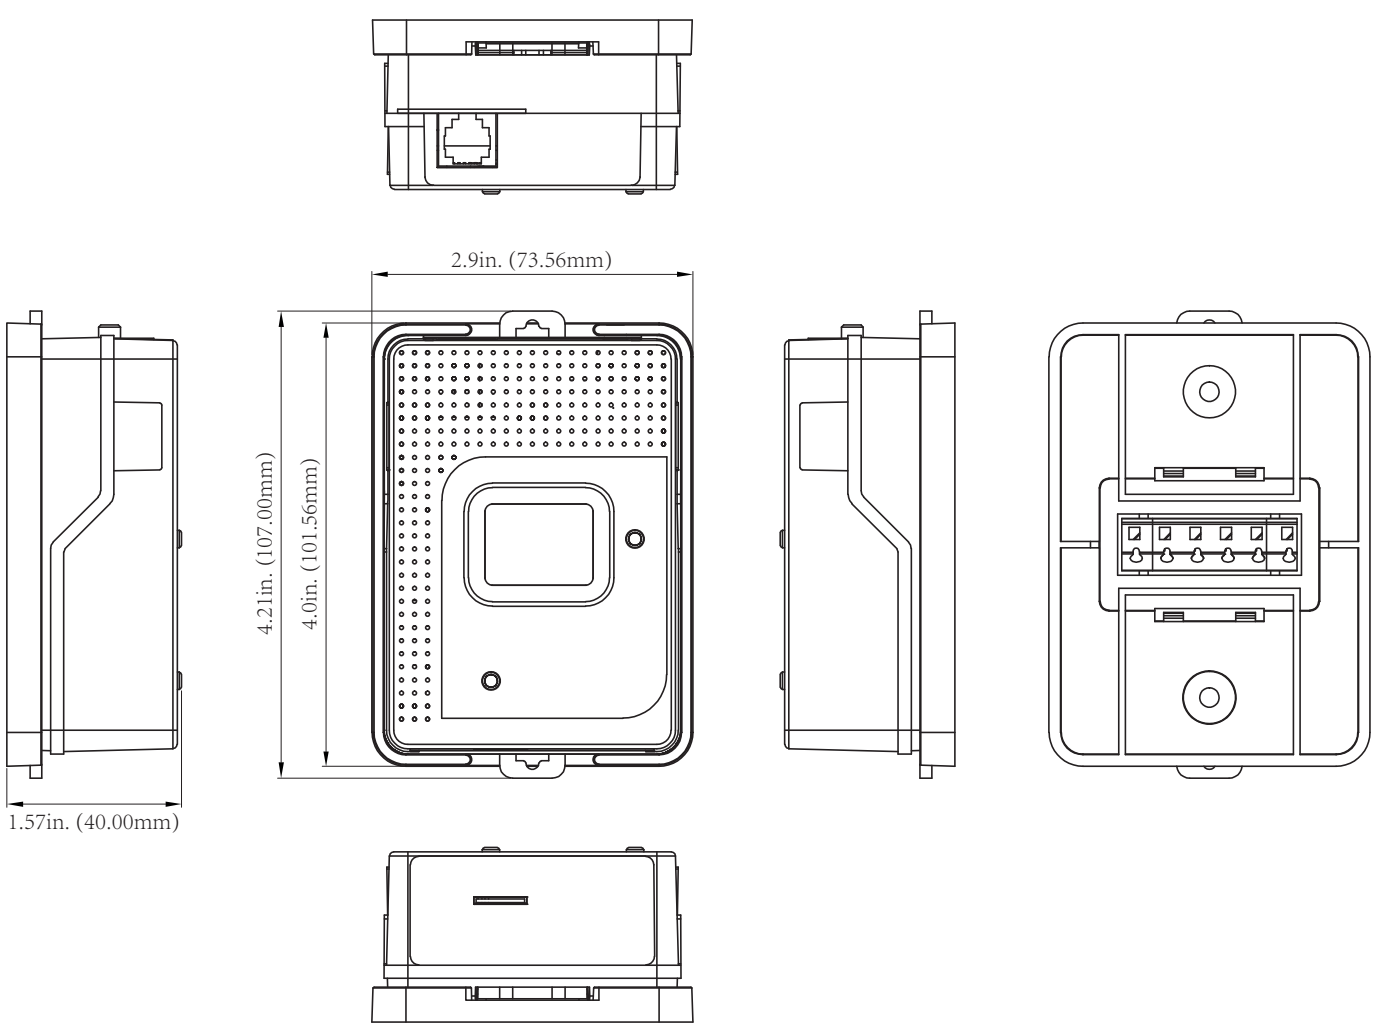

Intertek 5008191

© 2025 TrolMaster Agro Instruments Co., Ltd. All rights reserved.

Email: support@trolmaster.com
Phone: 877-420-9876