

DSP-2

240V Program Device Station

The TrolMaster DSP-2 Program Device Station (timer module) works like a multi-function timer. The DSP-2 allows the user to easily connect any device that needs to be controlled by TIME to the Hydro-X. Any device that is 10-amps at 240 volts or less can be controlled by the DSP-2.



Specifications

DSP-2

Input Voltage

Voltage	100-240V~, 50/60Hz
---------	--------------------

Output Current

Current	10A
---------	-----

Output Voltage

Voltage	100-240V~, 50/60Hz
---------	--------------------

Working Environments

Temperature	32-122°F (0-50°C)
Humidity	≤90%

Package Content

240V Program Device Station	1pc
16ft RJ12 Cable	1pc
4ft RJ12 Cable	1pc
RJ12 T-Splitter	1pc

Package Dimensions

Size	3.35inch / 85mm (L) x 3.15inch / 80mm (W) x 3.54inch / 90mm (H)
Gross Weight	12.0oz / 340g


LED Indicator Status

LED Indicator	Module Status
Fast Blinking Green	Module is not addressed to the main controller, OR module does not have a good connection to the main controller. *Note: Pressing the small address/link button on the module when first installed.
Slow Blinking Green	Module is addressed and connected to the main controller, and is currently turned OFF.
Solid Green	Module is addressed, connected, and main currently turned ON.
Blinking Red	Module is overloaded. Reset the overload by unplugging the module from powersource .

Link Up

DSP-2

CONNECTION DIAGRAM

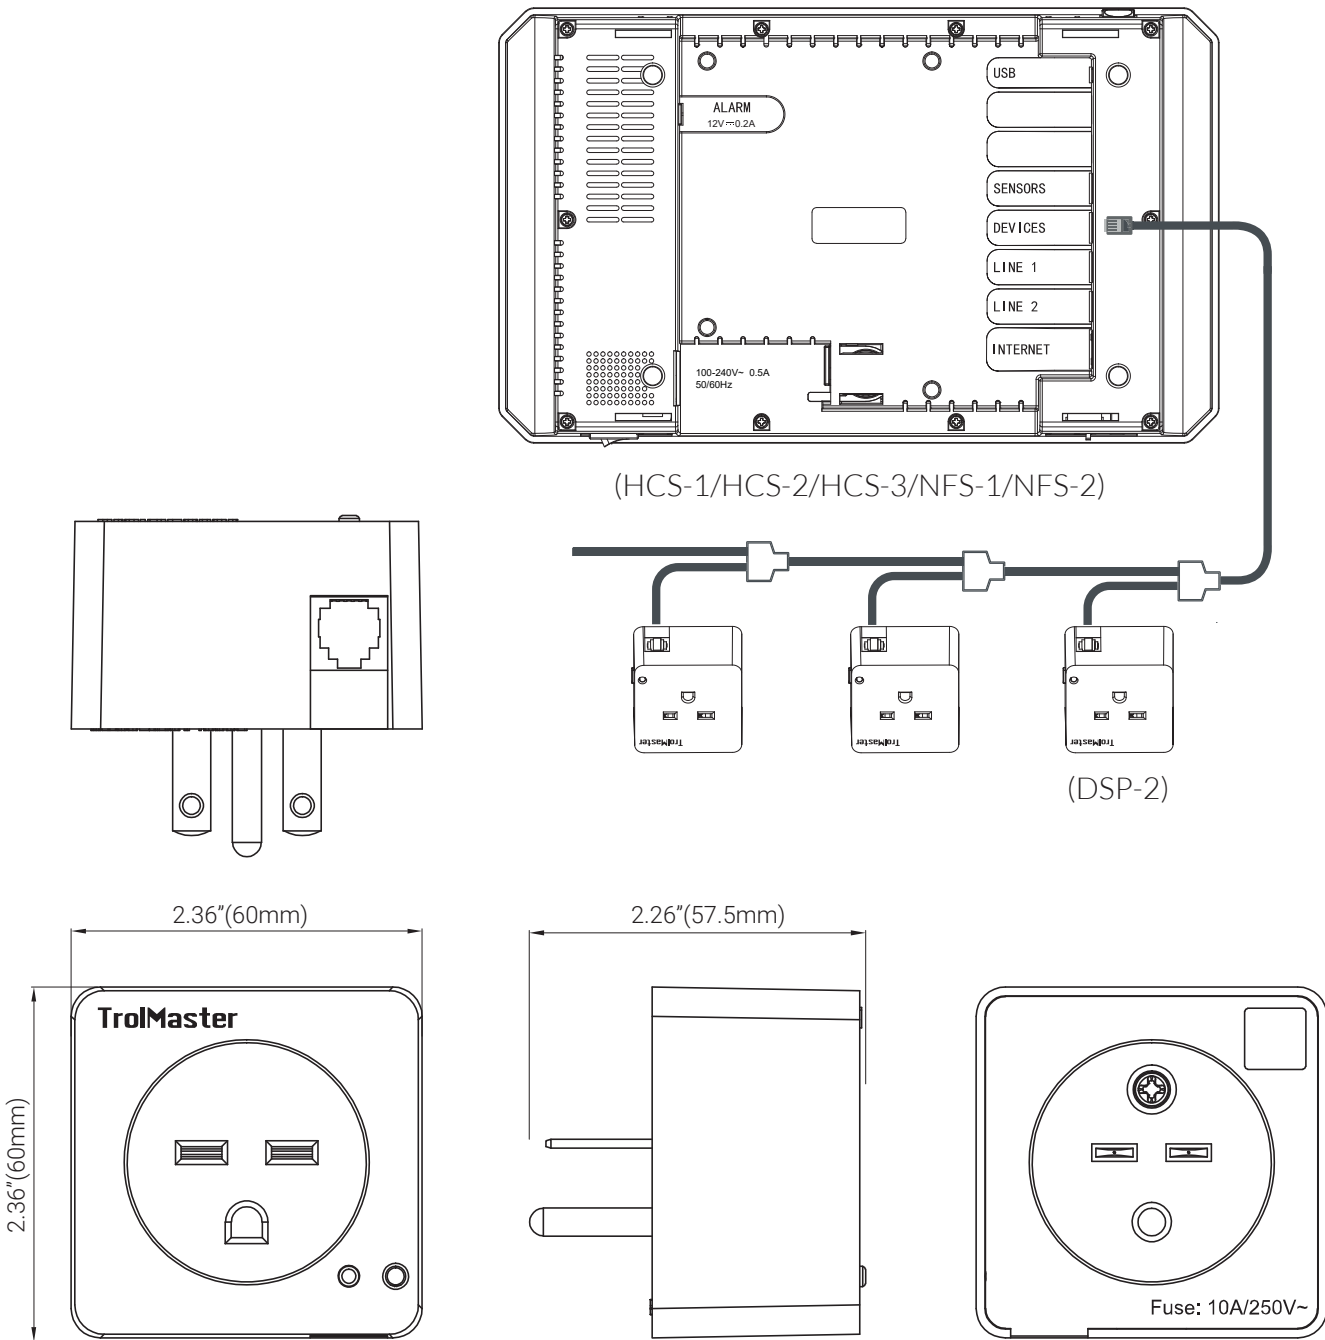

FC RoHS