


**315**

315w Electronic Ballast 120-240v Rated Voltage

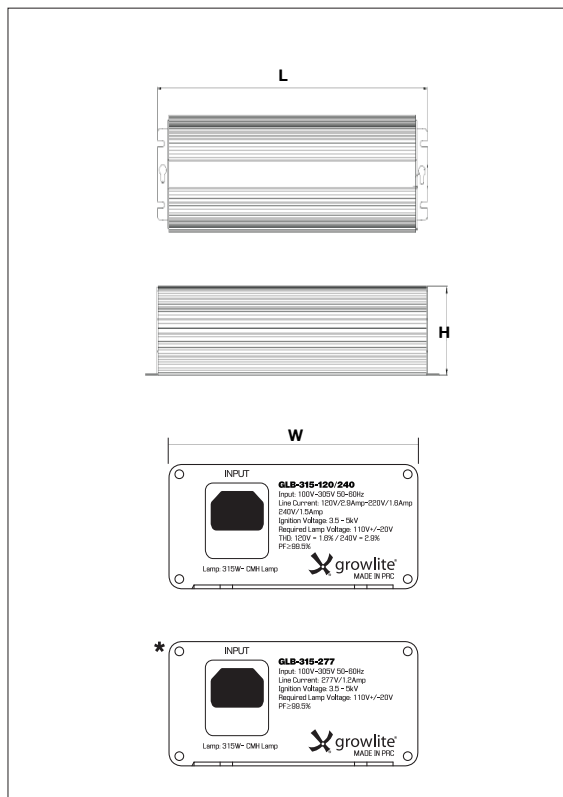

Features & Benefits

Fully compatible with CMH lamps 315W
120-240v standard
50/60Hz
Soft start
High quality components for less heat
LED Power Indicator
Open/Short circuit protection
End of life/ Overheat/ Ignition Failure protection
120v Power cord provided
3-Year Warranty

Performance Data

Input Rated Voltage: 100v-305V*
CF:<1.5 PF:≥ 99.5%
Input V/C: 2.9A@120V - 1.6A@220V - 1.5A@240V - 1.2A@277V*
Input Frequency: 50/60Hz
Ignition Voltage: 3.5 - 5kV
Required Lamp Voltage: 110V+/-20V
THD: 120V = 1.6% / 240V = 2.9%

DIGITAL BALLAST 315W 120-240v
Dimensions : L7.48"x W4.01"xH2.04 "
Item No. GLB-315-120/240
Item No. GLB-315-277*
UPC No. 609728141301
Weight 3.31 lbs / 1.5 kg

*Rated for 277 Volt

GROWLITE Inc.
Phoenix, AZ 85009
USA
Tel.: +1 562 944 0808
Fax: +1 602 456 5468
info@growlite.com



Visit our website for more information,
fresh new media, and merchandise.
www.growlite.com

© 2016 growlite. All rights reserved.